


AJAX-MOTIONPROTECTCURTAIN

Narrow beam indoor motion detector. Protects windows, doors, and valuables

AJAX

COP.

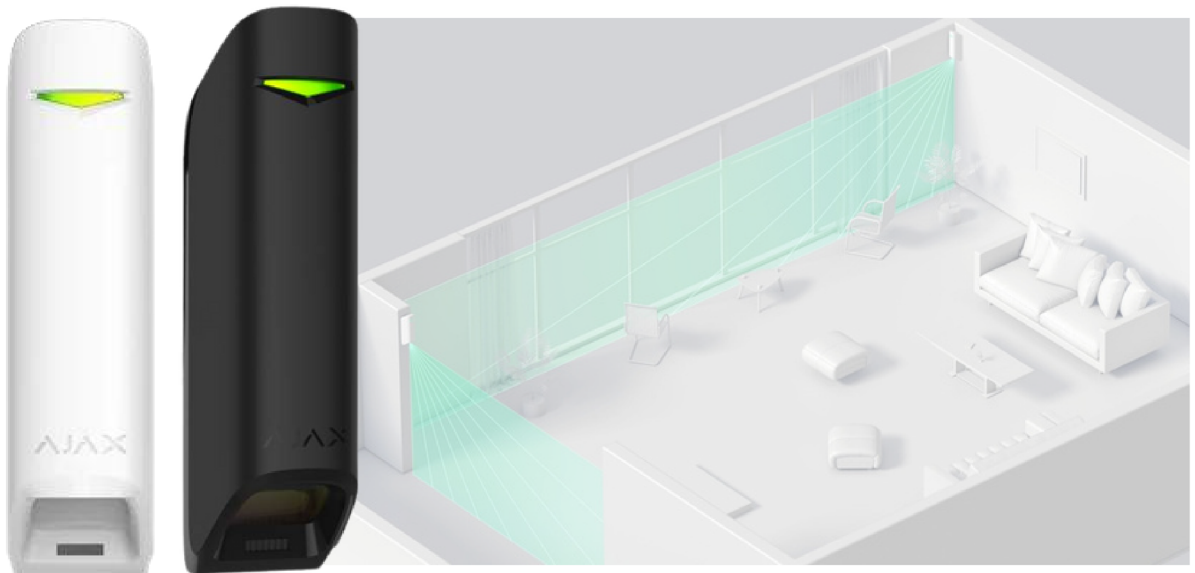

Classification	Radio-interlinked photoelectric security detector
Type of detector	Wireless
Motion detection distance	Adjustable (from 6 to 15 meters)
Installation method	Indoors only
Compatibility	Operates with all Ajax hubs and range extenders
Sensing element	Two PIR sensors
False alarm reduction	Available, Correlation Signal Processing
Alarm signal delivery time	0.15 seconds
Detection angles	Horizontally – 6° Vertically – 90°
Time for motion detection	From 0.3 to 2 m/s

Sensitivity	Adjustable, 3 levels
Recommended installation height	2.4 meters
Power supply	Battery: CR123A, 3 V
Battery life	Up to 3 years
Jeweller radio technology	<p>Communication range with detectors – up to 1,700 m in an open space Two-way communication between devices</p> <p>Radio frequency bands: 866.0 – 866.5 MHz 868.0 – 868.6 MHz 868.7 – 869.2 MHz 905.0 – 926.5 MHz 915.85 – 926.5 MHz 921.0 – 922.0 MHz (depends on the region of sale)</p> <p>Self-adjusting RF output power – up to 20 mW Block encryption based on AES algorithm Detector polling period – 12-300 s Frequency hopping</p>
Temperature sensor	Available
Operating temperature range	From -10°C to +40°C
Operating humidity	Up to 95%
Anti-sabotage	Fraud protection, Jamming notification, Tamper-resistant
Remote configuration and testing	+
Protection class	IP54
Dimensions	134 × 44 × 34 mm