

## DS-K1F600-D6E Series Enrollment Station

The enrollment station can realize multiple user information's enrollment on one device. It supports enrolling face picture, fingerprint (parts of the device model support), 13.56 MHz IC card No., and 125KHz ID card No.



### Available Models

- DS-K1F600-D6E
- DS-K1F600-D6E-F

### Features

- 3.97-inch LCD touch screen for face recognition, parameters configuration, live view, etc.
- 2 MP wide-angle dual-lens
- Face anti-spoofing
- Face recognition distance: 0.3 m to 1.5 m
- Deep learning algorithm
- Face recognition duration < 0.2 s/User; face recognition accuracy rate ≥ 99%
- 2,000 user capacity, 2,000 face capacity, 20,000 card capacity, and 20,000 fingerprint capacity
- Enrolls data via the device and transmits the data from the device to the platform via TCP/IP protocol  
Enrolls data remotely via the client software
- Stand-alone operation
- Manage, search and set device data after logging in the device locally




## Specifications

Model		DS-K1F600-D6E	DS-K1F600-D6E-F
System	Operation system	Linux	
Screen	Dimensions	3.97 inch	
	Resolution	800 × 480	
	Type	Capacitive	
	Operation method	Touch	
Video	Pixel	2 MP	
	Lens	2	
	WDR	Support	
	Video standard	PAL/NTSC	
Audio	Audio output	Support	
	Volume adjustment	Support	
Network	Wired network	TCP/IP	
	Wi-Fi	Support	
Interface	Power interface	Round	
	USB	1	
	PSAM card	Reserved	
Capacity	User capacity	2000	
	Card capacity	20,000 (The displayed capacity on the device screen varies according to the configured enrollment rules)	
	Face capacity	2000	
	Fingerprint capacity	/	20,000 (10 fingerprints per person)
	Event capacity	2000 offline enrollment records	
Authentication	Card type	EM card and Mifare 1 card	
	Card reading frequency	13.56MHz, 125KHz	
	Card reading distances	0 to 5 cm	
	Face recognition distance	0.3 m to 1.5 m	
Function	Face anti-spoofing	Support	
	Audio prompt	Support	
	M1 card encryption	Support	
	Time synchronization	Support	
Others	Supplement light	Support	
	Indicator	Not support	
	Power supply	12 VDC, 15 W	
	Working temperature	-10 °C to 50 °C (14 °F to 122 °F)	
	Working humidity	10% to 90%	

Model		DS-K1F600-D6E	DS-K1F600-D6E-F
	Dimensions	121.6 mm × 137.9 mm × 125 mm (4.8" × 5.4" × 4.9")	
	Application environment	Indoor	
	Weight	0.5 kg (1.1 lb)	
	Installation	Base mounting	

## Dimensions

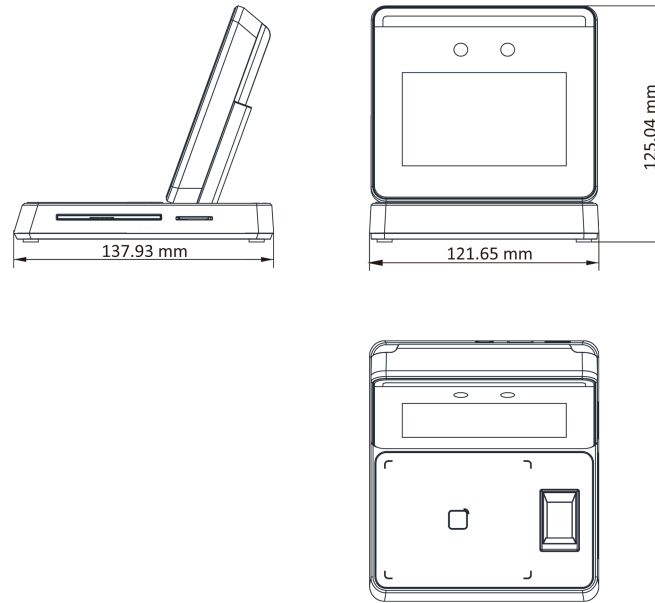

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com