

THC-T250-MS 5 MP Fixed Turret Camera



- 5 MP high performance COMS
- 2560 × 1944 resolution
- Digital WDR
- 2.8 mm, 3.6 mm fixed focal lens
- Smart IR, up to 40 m IR distance
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- Audio over coaxial cable, built-in mic
- IP67

▪ Specification



Camera	
Image Sensor	5 MP CMOS
Signal System	PAL/NTSC
Resolution	2560 (H) × 1944 (V)
Frame Rate	TVI: 5MP@20fps, 4MP@30fps, 4MP@25fps, 1080P@30fps, 1080P@25fps CVI: 4MP@30fps, 4MP@25fps AHD: 5MP@20fps, 4MP@30fps, 4MP@25fps CVBS: PAL/NTSC
Min. illumination	0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s
Lens	2.8 mm, 3.6 mm fixed lens
Field of View	2.8 mm, horizontal FOV: 85.5°, vertical FOV: 63.7°, diagonal FOV: 110.7° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 63.7°, diagonal FOV: 105.9°
Lens Mount	M12
Day & Night	ICR
WDR (Wide Dynamic Range)	Digital WDR
Audio	Built-in mic
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 75°, Rotation: 0 to 360°
Menu	
AGC	Support
White Balance	ATW/MWB
Language	English
Functions	Brightness, Sharpness, DNR, Mirror
DWDR	Support
D/N Mode	Smart/color/BW(Black and White)
BLC	Support
Interface	
Switch Button	TVI/AHD/CVI/CVBS
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity 90% or less (non-condensing)
Power Supply	12 VDC ± 25% *You are recommended to use one power adapter to supply the power for one camera.
Power Consumption	Max. 3.7 W
Protection Level	IP67
Material	Metal
IR Range	Up to 40 m
Weight	450 g (0.99 lb.)
Dimension	∅ 127.92 mm × 100.15 mm (∅ 5.04" × 4.03")
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensation)

▪ Available Model

THC-T250-MS(2.8mm)(HiLook UK)

THC-T250-MS(3.6mm)(HiLook UK)

▪ Dimension

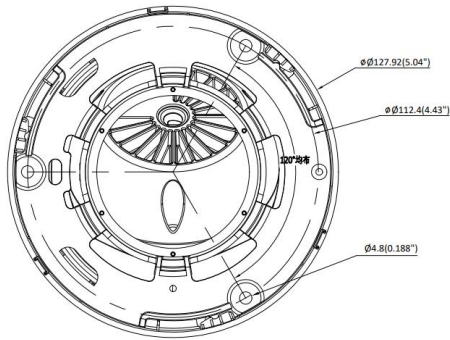

unit:mm

